



**AIR POGO XTREME® LIMITED WARRANTY CLAIM PROCEDURE**

For coverage under this limited warranty, proof of the date and place of purchase must be submitted. Simply fill out the warranty information and return it to us now.

If you should need warranty service, call our Customer Service Department at **800-880-POGO (7646)**, or write Air Pogo, 520 Salem Ave, Holly Springs, MS 38635.

This limited warranty does not apply to any part if the damage has been caused by consumer abuse, misuse, vandalism or accident. Also, present color technology does not enable us to warranty against color fading over time.

Implied warranties of merchantability or of fitness for any particular purpose are limited in duration to the 90 day warranty period as specified, although some states do not allow limitations on how long an implied warranty lasts, so this limitation may not apply to you.

Air Pogo will not, under any circumstances, be liable for any incidental or consequential damages for breach of the warranty or of any implied warranty. Again, some states do not allow the exclusion or limitation of incidental or consequential damages, so this exclusion may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state. **Not applicable outside U.S.A.**

**WARRANTY INFORMATION**

Product Name \_\_\_\_\_ Date Purchased \_\_\_\_\_

Store/Catalog Where Purchased \_\_\_\_\_ Cost of Toy \_\_\_\_\_

Age of Purchaser:  18-24  25-34  35-44  45-54  55 & over

Purchaser is:  Male  Female Child is:  Male  Female Age of Child Receiving Toy: \_\_\_\_\_

Reason for Purchase:  Birthday  Christmas  Other \_\_\_\_\_

How did you learn about this toy?  Magazine Ad  Newspaper  Catalog  Friend  Store Display  
 Package  Other \_\_\_\_\_

Name \_\_\_\_\_  
(Last) (First)

Street \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_ Phone \_\_\_\_\_



**MODEL# 35-XBLUE, 35-XGREEN**

**AIR POGO XTREME® OPERATING AND MAINTENANCE INSTRUCTIONS**

Thank you for purchasing our exciting new Air Pogo Xtreme®. Please read and follow all warnings and instructions, review them with your children and their playmates, and save this information for future reference.

Air Pogo Xtreme® has been designed and tested for safety, however, children using it will need proper instruction and supervision. Air Pogo Xtreme® is intended to be enjoyed as a bouncing swing and as a new type of pogo for children. Observing the following statements and warnings reduces the likelihood of serious or fatal injury. All instructions and warnings should be reviewed frequently.

**WARNING:** On site supervision of children using Air Pogo Xtreme® should include all of the following precautions related to safe and happy play.

**WARN CHILDREN:**


1. NOT TO use the Air Pogo Xtreme® until it is properly assembled and installed by an adult.
2. NOT TO get off Air Pogo Xtreme® while it is in motion and to hold both the handle and seat when dismounting, because Air Pogo Xtreme® WILL REBOUND!
3. NOT TO bounce Air Pogo Xtreme® against the ground.
4. NOT TO exceed the maximum safe weight ratings: Air Pogo Xtreme® was designed to be used by one child at a time, 5 years old to adult, weighing between 30-200 pounds.
5. NOT TO touch the rope at any time during play.
6. NOT TO use Air Pogo Xtreme® in a manner other than intended.
7. NOT TO swing an empty Air Pogo Xtreme®.
8. NOT TO walk near or around a swinging Air Pogo Xtreme®.
9. NOT TO use Air Pogo Xtreme® if it is wet.
10. NOT TO attach items to Air Pogo Xtreme® such as, but not limited to, jump ropes, clothesline, pet leashes, cables, chain and rope as they may cause a strangulation hazard.
11. NOT TO twist rope or loop it over top support bar since this may reduce the strength of the rope.
12. TO center their weight on the seat and to swing or to bounce with a gentle, rhythmic motion.
13. TO hold the handle with both hands at all times.
14. TO dress appropriately with well fitting shoes and no ponchos, scarves or other loose fitting clothing which is potentially hazardous.

**INSTALLATION INSTRUCTIONS:**

1. Install Air Pogo Xtreme® over level ground, not less than 6 feet (1.8m) from any structure or obstruction such as a fence, garage, house, tree trunk, interfering branches, laundry line or electrical wire.
2. DO NOT install Air Pogo Xtreme® over concrete, asphalt, packed earth or any other hard surface.
3. Install Air Pogo Xtreme® seat, at a height of approximately 3 feet (1m) above the ground, from a substantial overhead support such as a tree limb or large swing set frame. The minimum support height is 8½ feet (2.6m). (DO NOT bounce on the ground.)
4. DO NOT attach Air Pogo Xtreme® to a cantilever device such as a tree limb or swing set without first determining if the device, at the point of attachment, will support a minimum force of 600 pounds.

**INSTALLATION INSTRUCTIONS: (CONTINUED)**

- If installed as instructed, the maximum fall height of this product is seven feet.
- Secure the rope with a slip proof knot. Wrap any remaining rope around the support so that no excess rope dangles from the knot.
- Air Pogo Xtreme® can be minimally adjusted to a child's weight by adjusting the knot; slightly raise or lower the height of the seat above the ground. Air Pogo Xtreme® must not hit the ground. **INSTALLATION INSTRUCTIONS: (CONTINUED)**

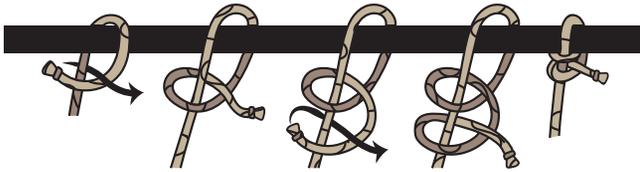

**TWO HALF HITCHES:**  
This knot is suitable for tying your AIR POGO XTREME® to the overhead support. You can tie additional hitches with any excess rope.

**X3. CONSUMER INFORMATION SHEET FOR PLAYGROUND SURFACING MATERIALS**

X3.1 M g f l n e j h g e m l l q g e e d k s g f H k a e l k l l g n d l ((((((  
h d q j g n f i m h e f l j d l a f b j a k j k n d a f j g e d k l g l j g n f k n j j l j l  
f f m d i a f M e k h d e j f q j g g e k f b j a k a f n g h a f l a k r j h l l j f f l g  
e g f l e g k k j a g n g g d h d q j g n f a f b j a k r a l h g l f l a d l g l d  
h j l a n d j d o f l a f b j a k t g l k n j n f j f j g n f h d q j g n f  
i m h e f l f e h j l g j a f l j e a f l a f b j a k n a f h g l f l a d g d l l a k d  
n a f l l l d i g f l g k g c k g j a f k n j a k d k d c d l g n k k j a g n a f b j a k l f  
d i g f l g j k n j H d q j g n f i m h e f l k g n d f n j h d g f j k n k k n  
k g f j l g j k h d f o a d j k k e q h h j l g h l d a e q i n a c d j n f l g j  
h c j l a f j k g a l j a j j c e n d o g g a k a f k f g j a f  
j n d j g f k a j l g h l d k g c k g j a f k n j k o f a f d i d f  
e a f l l k n a a f l h n f j f j g n f h d q j g n f i m h e f l

X3.2 d p ) d k k l e p a e n e a l j g e o a a d o g n d f g l p h l l g  
k n d a f d l j l f a f a f b j a k a f d i g f l g g n j a j f l d g k a t k n j a f e l j a k  
a l q j a f d i d f e a f l a l h l k g l l f ) a f g o n j a k g n d  
j g f a r l l d i a f b j a k m l g e d k f f g l h j n f l f g e l l j o l k n j a f e l j a d  
a k a k

X3.3 l a k j g e e f l l k g c k g j a f e l j a d g n d p l f e a f a e n e g . l  
a f d i a l a g f k j g e l h j a e l j g k d l a g f j q i m h e f l k n k d e j k f k h k  
g o n j n k a d j f e q d j l d b n e h j g e e g n a f k o a f l k g c k g j a f  
e l j a d k g n d p l f a l j g l f j j g k o a f e a f a e n e a d f g l a e k l  
a l g l h a n g l h a g l e k n j g e h a f l a k d f l l h a n g l g l k n h g l a f  
k j m l n j

X3.4 a k a f g i e l a g f a k a f f l g k k a f e g h j a f l j d l n k g e k g j a f  
h j h j a k g n j a g n k e l j a d k g h j l a n j e l j a d a k j g e e f g n j f g l j  
g o n j e l j a d a k g f d i l a n o f h j h j d i e a f l a f l j a d k k g n d  
c h j g e a d h f j h d f a k l g e a f l a f g j l h l k l j e a f f k k j q g j  
q g n j i m h e f l g a g e l j a d h f k g f l l q h f a l g l h d q j g n f  
i m h e f l l n a d a l l q l e l j a d a f q g n j j f a k g l

**TABLE X3.1 Fall Height in Feet From Which a Life Threatening Head Injury Would Not Be Expected.**

Type of Material	6 in. depth	9 in. depth	12 in. depth
Double Shredded Bark Mulch	6	10	11
Wood Chips	6	7	12
Fine Sand	5	6	9
Fine Gravel	5	7	10

**MAINTENANCE**

At the beginning of each season and twice monthly during the season:

- Check nut and bolt below the seat, the four seat screws, and the two cap screws.
- Treat the rope and bushing in top safety cap with a Teflon based lubricant (such as Super Lube). DO NOT use a petroleum based lubricant.
- Check the rope, knots, handle, top and bottom caps and seat for evidence of deterioration, excessive wear, fractures, breaks, sharp edges and replace as necessary. The Air Pogo Xtreme® rope has a red indicator core. If you see the red indicator core, your Air Pogo Xtreme® rope needs to be replaced. Discontinue use immediately. Replacement parts may be ordered online at [www.airpogo.com/parts](http://www.airpogo.com/parts).
- Take Air Pogo Xtreme® indoors when the outside temperature drops below 32° F.
- If these checks and inspections are not carried out, Air Pogo Xtreme® may cause a fall. However, when made at the prescribed intervals, these precautions will provide for long-lasting and safe use of this fun toy. Any misuse of this product could cause serious or fatal injury.
- Replacement parts may be ordered online. Visit [www.airpogo.com/parts](http://www.airpogo.com/parts) to order.

**DISPOSAL INSTRUCTIONS**




The separate parts of Air Pogo Xtreme® are recyclable. Please help us protect our environment.



**EASY ASSEMBLY INSTRUCTIONS**

Adult Assembly Required • Tool Needed: Philips Head Screwdriver

CONTENTS: 1 - 5 ft. Center Pole with Rope; 1 - Swing Seat;  
1 - Center Pole Cap; 2 - AIR POGO® Labels\* & Instructions  
(\*AIR POGODOTS model is furnished with pogodots); 6 - Screws



- Thread rope end through center hole of swing seat.
- Slide seat down center pole tightly against base of pole. Seat will be in correct position when resting on lip of the pole.
- Insert four screws into pilot holes under seat and tighten.
- Thread rope end through center pole cap and slide cap down onto center pole.
- Mount cap onto top of center pole using two screws and tighten.
- Place two AIR POGO labels vertically on opposite sides of center pole, approximately one inch below pole cap.  
\* Arrange the pogodots at random in a design of your choice on center pole.

